

AC 500

Cummins
Mecc Alte
D+ &



ISO8528

GC ,) &

SZUTEST

GC - \$\$\$



2000/14/EC

&\$\$\$#(#

z) \$' z' \$z' D:

	"	"	"	"	Amp
400/230	500,00	400,00	455,00	364,00	656,00

fPQDE

GC ,) &

,) & z

fDF DE

%\$!

% %&

GC " \$(**

z&(

GC

Standard Specifications

z

fl

!

E

z

z

ALTERNATOR

TRANSFER SWITCH

AC 500

Cummins
Mecc Alte
D+' &'

Manufacturer		Cummins		
Model		QSX 15 G6		
		%\$\$' "# "		
		() - \$\$\$' "		
		0% \$\$\$< DQ		
	L	15,000		
	"	137 x 169		
		17,0:1		
	fl # 7	"# "	1500	
	fl 7	L	91,00	
		L	66,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	33,00		
	' # "	637,00		
	' # "	82,20		
	° C	515,00		
		24 V d.c.		
	Load	%\$\$i	'+) i) \$i
	# "	95,90	74,30	51,30


		Mecc Alte		
		ECO 40-3S		
	Hz	50		
	"	500,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	721,00		

		fl 7		fl 7	
	"	"	"	"	L
AC 500	3815,00	3407,00	1550,00	2103,00	850,00
		fl 7		fl 7	
	"	"	"	"	L
MS 80	4815	4810	1606	2615	850

AC 500

Cummins
Mecc Alte
D+' &'

1 D+' &'

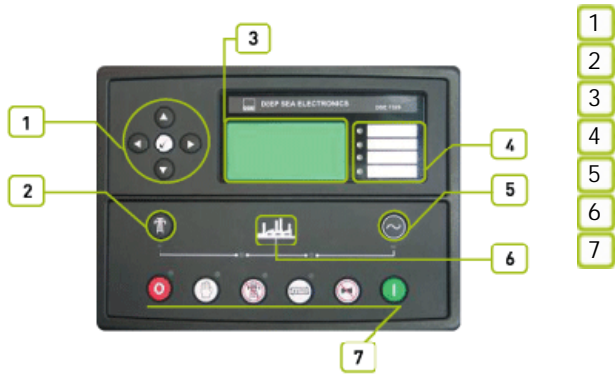

2

'8G9ž + ' &\$ž) 5ž&&\$#(\$

3




4




5

'8G9+' &\$' ž&&\$' žž



'8G9+' &\$' '8G9+' &\$' žž



% &1* ('

žFG& žžFG(,) ž

ž

AC 500

Cummins
Mecc Alte
D+ &

f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B**\$-)\$

6G'9B**%\$\$\$!*!&

6G'9B**%\$\$\$!*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&*(

&(\$)

ž

ž

ž

ž

AC 500

Cummins
Mecc Alte
D+ & "



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850