

# AC 880

Cummins  
Mecc Alte  
D+ & T



<b>ISO8528</b>	...	...	...	...	...	GC , ) &-
<b>SZUTEST</b>	...	...	...	...	...	GC - \$\$\$%
<b>CE</b>						

**2000/14/EC**

&\$\$\$#( #

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	880,00	704,00	800,00	640,00	1154,00

...	...	...	...	...	...	GC , ) &-
...	...	...	...	...	...	GC - \$\$\$%

**Standard Specifications**

...	...	...	...	...	...	...
...	...	...	...	...	...	...

...	...	...	...	...	...	...
...	...	...	...	...	...	...

**ALTERNATOR**

...	...	...	...	...	...	...
...	...	...	...	...	...	...

**TRANSFER SWITCH**

...	...	...	...	...	...	...
-----	-----	-----	-----	-----	-----	-----

# AC 880

Cummins  
Mecc Alte  
D+' &'

Manufacturer		Cummins		
Model		QSK 23 G3		
		%\$\$' "# "		
		+*, \$\$\$' "		
		0\$' \$\$\$< DQ		
	L	23,150		
	"	170 x 170		
		16,0:1		
	fl # 7	"# "	1500	
	fl 7	L	103,00	
		L	120,00	
AbsorbedAirDischargeReSourceKey.Text	' # "	53,30		
	' # "	625,80		
fl ' # 7	' # "	147,80		
	° C	543,00		
		24 V d.c.		
	Load	%\$\$i	'+) i	) \$i
	# "			
		161,00	121,00	85,00


		Mecc Alte		
		ECO 43-1SN/4		
	Hz	50		
	"	800,00		
7cg'		0,80		
		3		
	fl 7	400/230		
	A	1154,00		
Temperature		H		

		fl 7		fl 7	
	"	"	"	"	L
AC 880	5950,00	3950,00	1705,00	2225,00	1500,00
		fl 7		fl 7	
	"	"	"	"	L
AK 90	9100,00	6500	2200	2353	850

# AC 880

Cummins  
Mecc Alte  
D+' &'

## 1. D+' &'

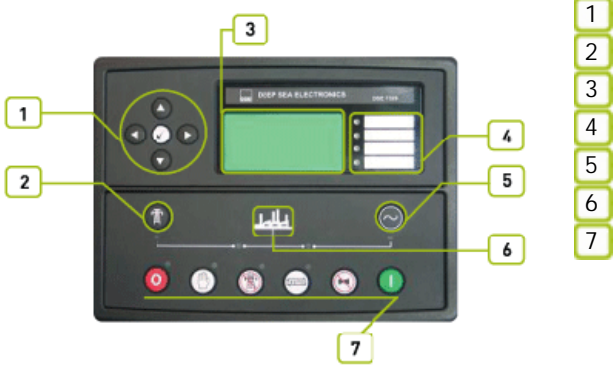

## 2.

"8G9Ž ' &\$Ž ) 5Ž&&\$#( \$

## 3.

## 4.

## 5.

'8G9+' &\$  
&&\$' Ź

"'8G9+' &\$'  
'8G9+' &\$'  
Ž "

% &1 \*(' "  
ŽFG&' &žFG(,) Ž "

Ž

# AC 880

Cummins  
Mecc Alte  
D+ &

f@z@Bl  
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#

#

6G'9B'\*\$-\$)'\$

6G'9B'\*\$\$\$!\*!&

6G'9B'\*\$\$\$!\*!(

f&%) +L

f&)(, L

f&% \$L

GA 8

!&+""

%, !&\*(

&(\$)

ž


ž

ž

ž

# AC 880

Cummins  
Mecc Alte  
D+ & "

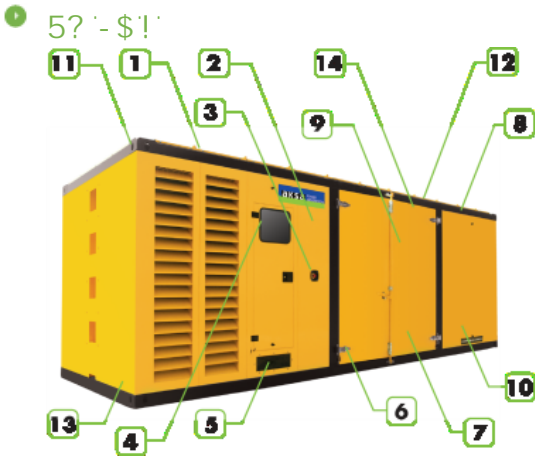

- 1 Steel structure made from steel sheet and steel profiles.
- 2 canopy and panels made from powder coated sheet steel.
- 3 Emergency stop push button.
- 4 Control panel is mounted on the baseframe . Located at the right side of the generator set
- 5 Cable cut locations are under or back of the canopy.
- 6 Corrosion-resistant locks and hinges.
- 7 oil could be drained via valve and a hose
- 8 Exhaust system in the canopy.
- 9 special large access doors (marine type) for easy maintenance
- 10 Fuel tank is at front of the canopy ,easy access to the fuel tank via lockable door
- 11 Lifting points similar to ISO container , located on each top corner of the canopy
- 12 the cap on the canopy provides easy access to radiator cap.
- 13 sound proofing materials
- 14 Integrated ladder built in to side of the canopy allows access to the top of the canopy.

	"	2200
fl "L	"	6500
fl "L	"	2353
	L	850